

Windows - A guide on works to windows in listed and other traditional buildings

October 2025
[3rd Edition]



CONSERVATION ADVICE

Contents

Introduction..... 4

Types of historic windows 5

 Mullion..... 5

 Quarries fixed in Lead Cames 6

 Mullion and Transom 7

 Side Hung Casement..... 8

 Yorkshire Sash..... 9

 Late-Seventeenth Century Sash 10

 Eighteenth Century Sash 11

 Nineteenth Century Sash..... 12

 Timber Windows 13

 Metal Windows 13

Plain Glass..... 14

 Slab glass..... 14

 Broad glass..... 14

 Crown glass..... 14

 Cylinder glass 15

 Polished plate glass 15

 Drawn flat sheet glass 15

 Float glass 16

Decorative Glass 16



CONSERVATION ADVICE

Coloured Glass 16

Stained Glass 16

Etched Glass..... 17

Engraved Glass..... 17

Rolled Glass 17

Do I need Listed Building Consent for works to my windows? 18

 Seeking Advice..... 20

Maintenance and Repairs..... 21

 Glass..... 21

 Timber Frames..... 22

 Metal Frames..... 23

 Window surrounds 24

Replacing Windows 24

Useful Resources 27

 Emails..... 27

 Websites 27

CONSERVATION ADVICE

Introduction

Windows are the eyes of a building – they let in light and give views out. They profoundly affect its character and appearance. Old windows will be a key element in the design and function of a historic building and contribute to its value and significance. Old windows are also evidence of the changing craft skills, technology and culture regarding light, health, wealth, design, and social status.

Historic windows are an irreplaceable resource and there is a strong presumption for keeping them. If replacement is unavoidable, then the new windows should be sympathetic to the building and match the existing. Modern windows embody the industrial materials and production that have largely superseded traditional craft skills, and for this reason are not considered to contribute to the heritage value of traditional buildings.


The thermal performance of historic windows can also be improved in several low-impact and low-cost ways including draught-proofing, curtains, blinds, internal shutters, and secondary glazing. Good maintenance will also improve the thermal efficiency of windows.

CONSERVATION ADVICE

Types of historic windows

Mullion


In traditional timber-framed buildings in Suffolk window openings were created in the original frame with mullions built in. These were originally unglazed but were closed by hinged or sliding shutters. Many houses retain a groove or rebate over the opening where the shutter was fixed. Mullions were sometimes square in section, but were most often fixed on the cant as 'diamond mullions'. More fashionable windows might have mullions with rolled and hollow mouldings.

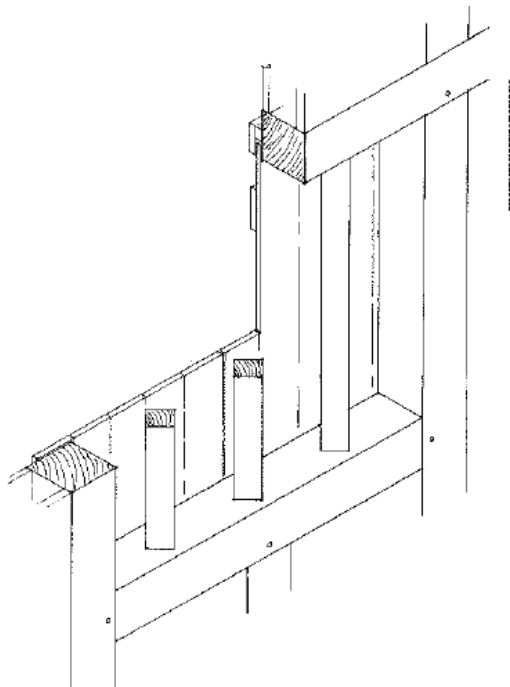

CONSERVATION ADVICE

Quarries fixed in Lead Cames


By the late 1500s glazing was becoming more common. Small pieces of glass known as 'quarries' were fixed in lead cames within an iron sash frame which could be nailed into the timber frame and mullions. In the later 1600s mullions with ovolo mouldings to the inside and chamfers or ovolo mouldings to the outside became common. These incorporated small rebates suitable for attaching glazing or opening sashes.

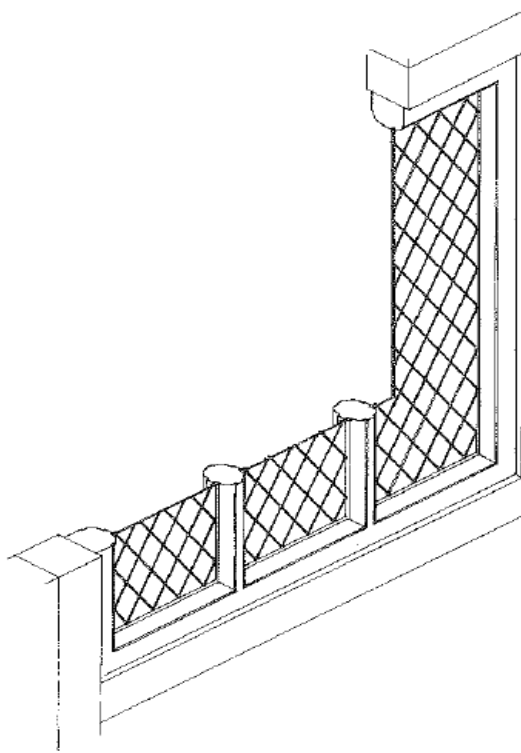

CONSERVATION ADVICE

Mullion and Transom

From the 1600s into the 1800s the most common type of window had horizontal transoms as well as mullions, often arranged in nine square panes of glazing fixed direct to the frame, but with an opener of two panes. Through the 1700s these began to be made in imported softwood instead of hardwood, and made as a separate item fixed to the building rather than built-in during construction.

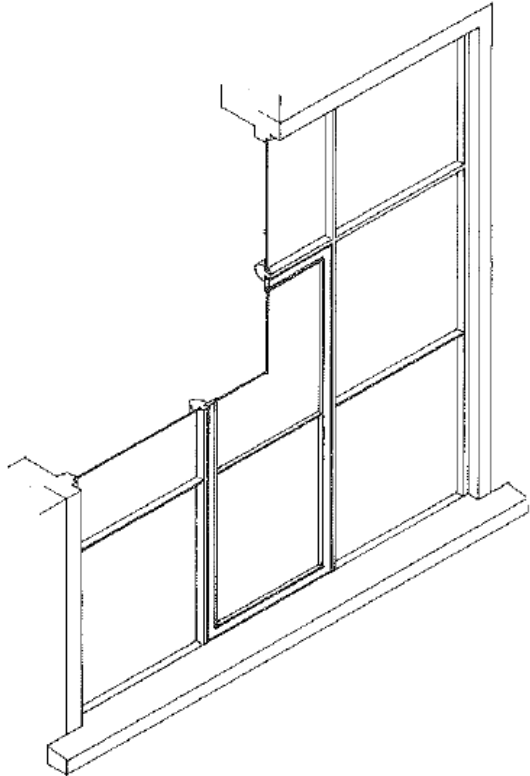


CONSERVATION ADVICE

Side Hung Casement

The most common historic window now seen in traditional buildings is the side-hung casement with a central mullion forming two lights. One light will be an opening sash and the other direct glazed or a fixed sash; each light will have a single horizontal glazing bar.


This type of window remained in use from the later 1700s until well into the 1900s and is usually the last traditional window to be superseded by unsympathetic windows in modern materials. Where there is no other evidence of traditional windows in a house, this type of window will be the most appropriate design to follow as the exterior of the building will usually be characterised by features and fabric of the 1700s and 1800s. The arrangement can be varied to suit openings of different shapes and sizes.

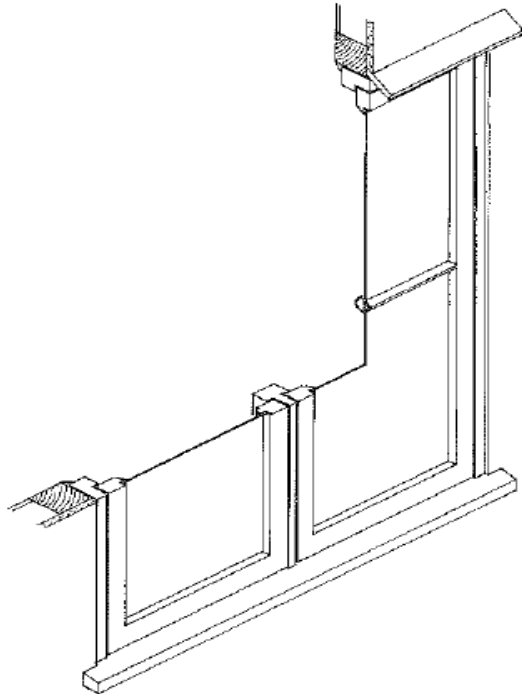

CONSERVATION ADVICE

Yorkshire Sash

Another more domestic type of window form is the 'Yorkshire sash', a horizontally sliding version of the norm, which did not require the elaborate counterweight system of vertical sashes. This, as its name suggests, was more prevalent in the north of England but they are also found in Suffolk. They originated in the 17th Century.

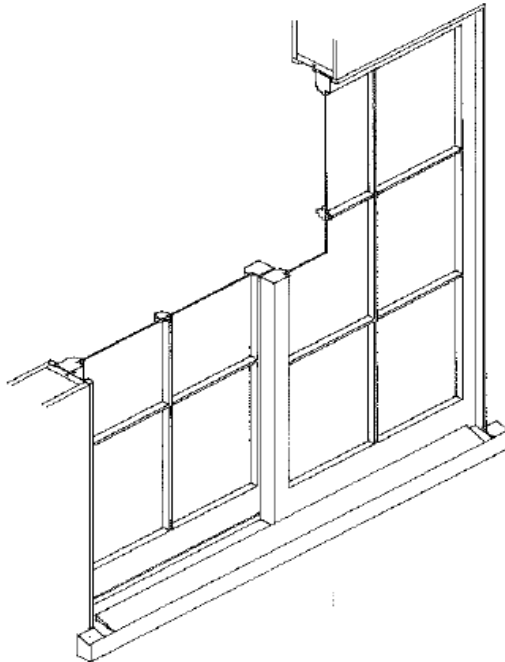


CONSERVATION ADVICE

Late-Seventeenth Century Sash

From the late 1700s, the double hung vertical sliding sash was increasingly used, usually in painted softwood. This presented a more vertically orientated opening in keeping with the fashionable classical proportions being adopted for buildings.

Early examples have quite thick ovolo moulded glazing bars and exposed sash boxes containing the counterweights, set flush with the outer face of the wall. Sometimes only one of the sashes were hung.

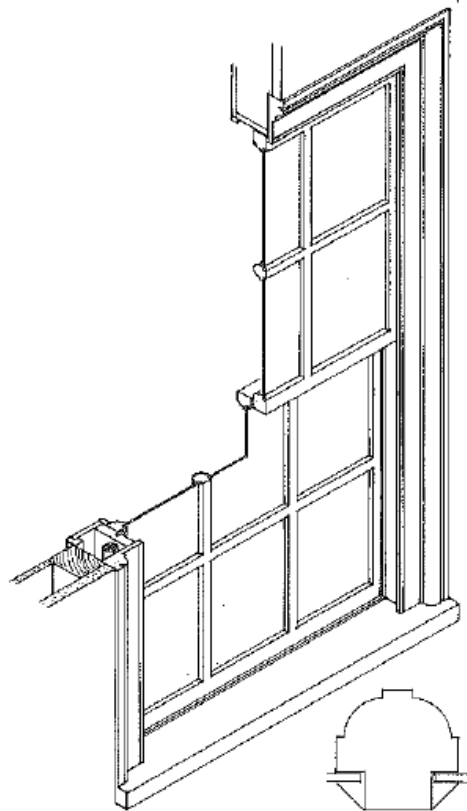


Glazing Bars: Ovolo

CONSERVATION ADVICE

Eighteenth Century Sash

The London Buildings Acts of 1709 and 1774 required firstly that sashes be set back 4 inches from the wall face and secondly rebated behind the wall face as a fire precaution. These styles of sash boxes both spread as fashions to the provinces some 20 years later. Gradually through the 18th Century panes of glass became bigger and glazing bars thinner, using lamb's tongue or ogee mouldings.


By the end of the 1700s sash windows were also produced with rounded gothic heads, whilst by the 1830s margin lights became fashionable.

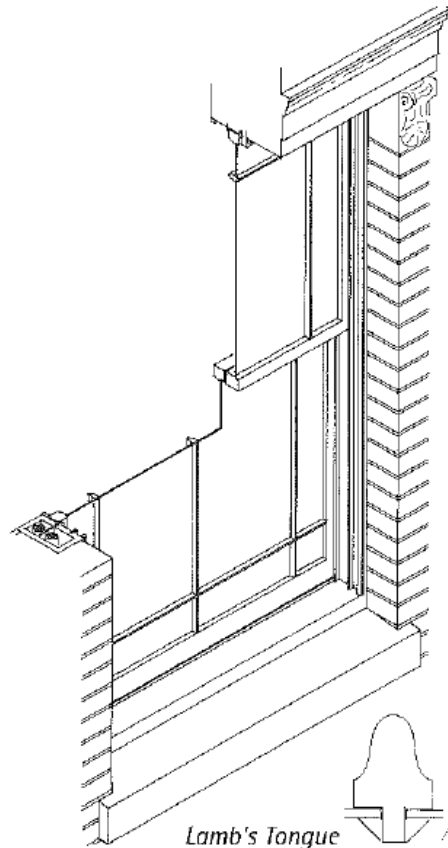

CONSERVATION ADVICE

Nineteenth Century Sash

In the 1800s sash windows generally had fewer but larger panes of glass, due to the improved methods of manufacture, together with even thinner glazing bars. This left the sash frame vulnerable to stress and rot, particularly at the corners, and saw the introduction of horned sashes with a stronger through tenon joint from the mid nineteenth century onwards.

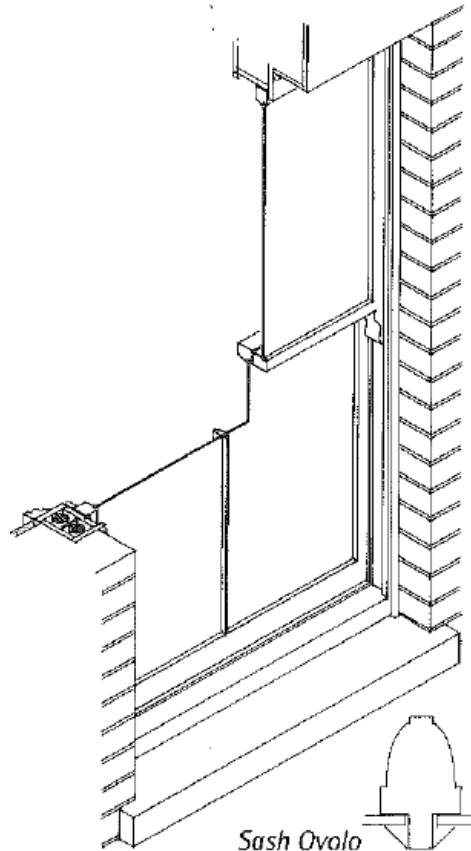

CONSERVATION ADVICE

Timber Windows

Earlier windows, such as mullion windows, were traditionally constructed of hardwood, such as oak. From the 1700s, softwood became more prevalent, particularly Deal pine. Modern softwoods are generally of inferior quality to Deal pine and other historic softwood, and where used in repairs, often fail before the remaining original softwood. This is an additional reason to therefore retain as much of the timber of historic softwood windows as possible.

Metal Windows

Timber frames are the most common form of historic windows, particularly in domestic buildings. However, metal windows could be found throughout all periods, particularly in more utilitarian settings.

Improved methods of casting in the eighteenth century made metal casements and fixed lights more precise and accurate, making them cheaper to produce. Cast iron was also more fire resistant than timber, making it a popular choice for industrial buildings.

The development of hot rolled steel in 1856 meant that inexpensive window frames could be produced in mild steel rather than wrought iron. By the late nineteenth century larger sheet glass allowed for its use for large openings such as shop fronts.

CONSERVATION ADVICE

After the First World War firms such as W F Crittall revolutionised the worldwide use of the metal casement. Crittall was responsible for the development of the 'universal suite' of hot-rolled steel sections that formed the basis of what is now regarded the 'classic' metal window.

Plain Glass

Most domestic windows have 'plain' clear glass panes, but their method of manufacture can result in different finishes and inclusions which add to their character.

Slab glass

Slab glass is the earliest form of window glass and was produced by casting molten glass into moulds on a flat surface.

Broad glass

A method widely used by the twelfth century to produce sheet glass. The glassmaker swung a bubble of molten glass back and forth whilst blowing to produce an elongated balloon. This was then laid on a very smooth surface and the two ends were cut off to leave a tube. This tube was sliced along its length with a pair of shears and flattened to form a small rectangular sheet of glass.

Crown glass

A method of producing sheet glass in which a bubble of molten glass was transferred onto a metal 'punty rod' or 'pontil rod' which can be spun between the hands of the glass- blower. The spinning causes the molten glass to blow open into a disc.

CONSERVATION ADVICE

The earliest known crown glass in England dates from the 1440s; crown glass was widely used for windows until the mid-nineteenth century, when taxation by weight ceased and cylinder glass became cheaper. Crown glass has not been manufactured since the early twentieth century.

Cylinder glass

A later and more developed form of broad-glass manufacture. Early examples are small, but by the end of the nineteenth century the cylindrical bubbles could be as much as 1.5m long.

As with broad glass, the rounded ends were cut off and the glass was cut and flattened. Also known as 'muff glass' and 'castle glass'.

Polished plate glass

The glass was cast onto a highly polished table of copper or cast iron. It was then ground and polished until flat and crystal clear. Developed in France, the process was used in England from the late-eighteenth century until mechanisation in the mid-nineteenth century made large sheets of plate glass less expensive.

Drawn flat sheet glass

Produced from the early-twentieth century, molten glass was drawn through a die into a flat continuous sheet rather than a slab or cylinder.

CONSERVATION ADVICE

Float glass

Float glass was invented in the late 1950s and involves flowing the molten material over a bath of molten tin. It is completely flat and therefore lacks the varied surface interest of earlier glass.

Decorative Glass

Stained glass windows in Britain can be traced back to as early as the seventh century, with some early examples found in churches and monasteries. The use of decorative glass in domestic buildings became more widespread from the nineteenth century onwards.

Coloured Glass

Glass can be coloured as part of the manufacturing process by adding chemicals, sometimes known as 'pot metal glass'. For example, Cobalt produces blue, and Manganese produces purple. For more expensive colours 'flashed glass' was sometimes used, where a thin coating of coloured glass was fused to colourless glass.

Stained Glass

Stained glass has a coloured material applied to its surface and is usually fired in a kiln. Silver stain (silver sulphides and nitrates) was used since the fourteenth century to give yellow and orange colours. Enamels were also used as early as the sixth century and by the sixteenth century a wider range of

CONSERVATION ADVICE

metal oxides gave a much broader colour palette.

Etched Glass

Introduced in the late nineteenth century, this technique is still used. An abrasive material is blasted against the surface of the glass through a stencil, leaving behind a design of more opaque 'frosted' glass. Hydrofluoric acid is also sometimes used.

Engraved Glass

Popular from the late nineteenth century, especially alongside etching methods, engravers used rotary grinding wheels to carve a range of designs.

Rolled Glass

Introduced at very end of the nineteenth century, also known as 'rolled plate glass', this technique runs hot glass through shaped rollers creating a variety of regular patterns to be formed on the surface. This allows for many geometric forms, as well as natural motifs of leaves and plants, to be easily created and mass produced. This technique is still very popular today and is used to texture float glass.

CONSERVATION ADVICE

Do I need Listed Building Consent for works to my windows?

The Councils currently have a Local Listed Building Consent Order (LLBCO) in place for certain works to windows on Grade II Listed buildings only. This gives blanket Listed Building Consent to any Grade II Listed building for the following works, providing that they meet specific conditions as set out in the Order:

- Installation of secondary glazing to historic windows
- Installation of double-glazed panes of glass or replacement of an existing window with a double-glazed unit, where the existing windows benefits from Listed Building Consent.

For more details on the Order, including the conditions and notification process, please see [Local Listed Building Consent Order - Windows - Mid Suffolk District Council - \[babergh.gov.uk\]\(http://babergh.gov.uk\)](http://babergh.gov.uk/LocalListedBuildingConsentOrder-Windows-MidSuffolkDistrictCouncil) / [midsuffolk.gov.uk / Local Listed Building Consent Order - Windows - Babergh District Council - \[babergh.gov.uk\]\(http://babergh.gov.uk\)](http://midsuffolk.gov.uk/LocalListedBuildingConsentOrder-Windows-BaberghDistrictCouncil) / midsuffolk.gov.uk

You will need to obtain Listed Building Consent before replacing any window in any part of a Listed Building where it is not covered by the LLBCO – this can still include modern windows. You may also need Listed Building Consent if window repairs involve losing substantial amounts of old material. Replacing

CONSERVATION ADVICE

plain panes of modern float glass is unlikely to require Listed Building Consent.

Any application should identify which windows are to be replaced. Foremost, it should assess the relative historic interest of the windows and their contribution to the significance of the building. They should also show (through drawings) any changes in the size or shape of the window opening, and any changes to the window design.

Detailed section drawings of the joinery will also be needed, at a scale of 1:2 for horizontal and vertical sections, and 1:10 for elevations. The sections should show the fabric adjacent to the window as well, so that we can properly understand how the window will appear. The details should include how the window opens, how the glass is fixed, and what finish is applied, including colour. These details can be included in the application itself but are otherwise required through a condition attached to the Listed Building Consent.

If the existing window is historic, but it is considered appropriate to replace it (i.e. because it is beyond repair) then the only acceptable replacement is normally an exact replica, matching the design, construction, materials, details, and finish of the existing. Old, surviving glass should be carefully removed and reused.

If the existing window is an inappropriate modern window, the replacement window may need to enhance the building's

CONSERVATION ADVICE

heritage value by emulating the design, materials and finish of a suitable historic example instead.

In the case of purpose-built domestic buildings, slimline double-glazed units can be used in new windows providing that the detailing is otherwise reflective of single glazing. In this case of converted barns and similar buildings with non-domestic origins, that did not traditionally have windows, then standard double glazing may be appropriate.

Seeking Advice

It is advised to consult the Heritage and/or Development Management (Planning) Departments to determine if Listed Building Consent and/or Planning Permission are needed to address such issues, at:

- heritage@baberghmidsuffolk.gov.uk / 0300 123 4000
Option 5, Option 3
- planning@baberghmidsuffolk.gov.uk / 0300 123 4000
Option 5, Option 3

For more specific guidance on the acceptability of works requiring any form of permission, formal pre-application advice can be sought - for more information please see <https://www.babergh.gov.uk/planning/pre-application-advice/> or <https://www.midsuffolk.gov.uk/pre-application-advice>.

CONSERVATION ADVICE

Maintenance and Repairs

With all work to windows it is important to assess what you are dealing with historically before you start. The following pages of this leaflet will hopefully provide a useful overview of this, whilst the publications listed at the end give more detailed further guidance.

Windows themselves are composite structures of timber, glass and metal, each part of which can be repaired as a separate element when required. Whenever possible the original fixtures and fittings of historic windows (hinges, catches, pulleys, handles, stays etc) should be kept for refurbishment and re-use on the window being repaired.

Glass

When carrying out repairs to historic windows it is important to save for re-use any old glass, which can be carefully removed from old frames by a skilled joiner. This has irreplaceable qualities of unevenness due to the original process of manufacture: 'cylinder glass' was produced by opening out a large blown cylinder of glass whilst 'crown glass' was produced by spinning a large disk. The centre of this disc, where the pontil was attached, is the bullseye which was generally used in an out of sight location or recycled rather than used as a fake picturesque 'add on' as it is today. The flaws in historic glass catch the light and show off defects which cannot be found in

CONSERVATION ADVICE

modern glass. Horticultural glass is a modern substitute that exhibits such defects to some degree and can be used in repairs.

When reglazing sash windows, care should be taken to adjust the sash weights for any change in the balance of weights caused by a different thickness of glass. In general, upper sashes should be slightly lighter than the weights, whilst lower sashes should be slightly heavier.

Any glazing should be undertaken using a traditional lined oil putty rather than modern compounds. Timber beading, which increases the apparent thickness of glazing bars, is particularly unwelcome.

Timber Frames

Careful repairs to timberwork, maintaining the maximum amount of historic fabric, are preferable. New sections of framing can be pieced in to match, and glazing bars replaced, using existing parts as a pattern. It should be noted that casement frames were traditionally inset within their overall frames, rather than projecting proud of their surrounds as in the 'weathered' casements so popular amongst modern window manufacturers.

Sashes can be easily removed from their frames by removing the staff beads on the inside. Sashcords can easily be replaced; access being gained to the sash weights via the removable

CONSERVATION ADVICE

pockets at the bottom of the pulley stiles. Replacement cords can be in jute, cotton or nylon. The stiles of sashes should not be painted but lubricated with wax, and not eased after a building has remained empty for some time as heat and ventilation can often do the trick.

The appropriate finish for historic windows after the seventeenth century is generally paint, most often white, and certainly not a modern stain. For complete authenticity on a Grade I or Grade II* listed building, permission can be obtained to use a traditional lead-based paint if appropriate.

Metal Frames

For metal windows, it is important to first identify the type of metal used to establish the correct approach. Ferrous metals such as iron and steel are magnetic, whereas non-ferrous such as bronze and aluminium or not. It may also be important to consider the method of manufacture as wrought and cast iron also have different properties.

Ferrous metal windows can suffer from surface rust, distortion, excessive build-up of paint and failed hinges and fittings. Rust and paint can be removed by acid pickling or flame cleaning. Any necessary repairs to wrought iron or steel windows, including welding in replacement sections, can be made by a professional metalworker.

CONSERVATION ADVICE

Cast iron windows cannot generally be welded because they tend to crack when heated, but they can be repaired using a technique known as 'cold stitching'. Non-ferrous frames can be repaired by brazing, soldering and welding.

Window surrounds

When renovating a window by repair it is important to remedy at the same time any defects in the surrounding fabric that may have initiated the original decay in the window. In this way the repaired material can be guaranteed a longer life. It is thus important to detail the surrounds to replacement or repaired windows properly.

On rendered walls a lay board (or pentice) is often fixed above the window head to throw off the rain and give a pleasing shadow line. Moulded surrounds should be carefully repaired or reinstated using the original as a pattern.

Cill details are also important to maintain, their projection varying with different window types. Timber cills are particularly vulnerable to rot and if replaced should be of oak or other durable native hardwood.

Replacing Windows

The complete replacement of historic windows should only be a last resort and in a listed building this will require consent. If

CONSERVATION ADVICE

this is done, particular attention should be paid to use the original mouldings and accurate setting out to the original pattern. With replacement casements the inclusion of additional night vents unbalances a window's elevation and is inappropriate. Most historic windows have already survived periods measured in hundreds of years. If properly repaired and reasonably maintained, they can be expected to last at least as long again.

In contrast, replacement of non-historic windows will likely be supported. Nonetheless, this also requires Listed Building Consent unless covered by the LLBCO. Where the existing are of unsympathetic design or materials, then a requirement for an enhancement may be warranted.

Additional or redesigned windows in a listed building should always be based on authentic historic precedents.

Whilst it is desirable to increase the energy efficiency of any building, such as through replacing windows, historic buildings are given special consideration under Building Regulations. There are also methods available for increasing the efficiency of existing windows, which should be considered first, particularly in the case of historic windows. For further information, please see our Energy Efficiency Guidance.

Typical traditional window details that new windows will normally be expected to replicate would include:

CONSERVATION ADVICE

- Flush frames, with no stormproofing.
- Slender frames, except where a more contemporary fenestration design is considered appropriate.
- Balanced frames – for example, where the frame dimensions of an opening casement match those of an adjacent fixed casement.
- Any glazing bars should be structural, with appropriate moulding and putty beading. Stuck-on bars will not be supported.
- Panes of broadly square proportions, again except where a more contemporary fenestration design is considered appropriate.
- Absence of untraditional details such as, top hung fanlights and external trickle vents.

When either repairing or replacing a window, it may be necessary to fill any gaps between it and the surrounding wall. Traditional materials for this task include lime mortar, a mastic made of sand and linseed oil, or rolled and wetted newspaper. Modern materials such as expanded foam and polysulfide sealant are unsuitable for historic buildings as they reduce vapour permeability, so should be avoided. Foam also has an unsympathetic appearance if left on show and can be difficult to remove again at a later date without damaging adjacent fabric.

CONSERVATION ADVICE

Useful Resources

Emails

- heritage@baberghmidsuffolk.gov.uk / 0300 123 4000
Option 5, Option 3
- planning@baberghmidsuffolk.gov.uk / 0300 123 4000
Option 5, Option 3

Websites

- Legislation for Designated Heritage Assets – HM Government. *Planning (Listed Buildings and Conservation Areas) Act 1990*. - [Planning \(Listed Buildings and Conservation Areas\) Act 1990 \(legislation.gov.uk\)](#)
- National Planning Policy – HM Government. *National Planning Policy Framework* - [National Planning Policy Framework \(publishing.service.gov.uk\)](#)

CONSERVATION ADVICE

- Heritage Asset Search – Historic England, 2024. *Search The List* - <https://historicengland.org.uk/listing/the-list/>
- Babergh and Mid Suffolk Conservation Area Appraisals – Babergh and Mid Suffolk District Councils, 2024. *Conservation Areas*. - <https://www.babergh.gov.uk/conservation-areas/> / <https://www.midsuffolk.gov.uk/conservation-areas>
- Listed Building Consent Process – Historic England, 2021. *Listed Building Consent Historic England Advice Note 16*. - <https://historicengland.org.uk/images-books/publications/listed-building-consent-advice-note-16/heag304-listed-building-consent/>
- Curtilage Listing – Historic England, 2018. *Listed Buildings and Curtilage: Historic England Advice Note 10*. - <https://historicengland.org.uk/images-books/publications/listed-buildings-and-curtilage-advice-note-10/>
- Local Listed Building Consent Order (LLBCO) - [Local Listed Building Consent Order - Windows - Babergh District Council - babergh.gov.uk / midsuffolk.gov.uk /](#)

CONSERVATION ADVICE

[Local Listed Building Consent Order - Windows - Mid](#)

[Suffolk District Council - \[babergh.gov.uk/\]\(http://babergh.gov.uk/\)](#)

[\[midsuffolk.gov.uk\]\(http://midsuffolk.gov.uk\)](#)

- Guidance on Planning Permission Requirements – Planning Portal, 2024. -
<https://interactive.planningportal.co.uk/>
- Ecology Advice – Chartered Institute of Ecology and Environmental Management, 2016. *A Householder's Guide to Engaging an Ecologist Key Considerations.* -
[https://cieem.net/wp-content/uploads/2019/02/A Householders Guide to Engaging an Ecologist Jan 2016.pdf](https://cieem.net/wp-content/uploads/2019/02/A_Householders_Guide_to_Engaging_an_Ecologist_Jan_2016.pdf)
- Further Ecology Advice – Bat Conservation Trust, 2024. *Getting Personalised Advice.* -
<https://www.bats.org.uk/advice/im-working-on-a-building-with-bats/getting-personalised-advice>
- Archaeology Advice – Suffolk County Council, 2024. *Suffolk Archaeological Service.* -
<https://www.suffolk.gov.uk/culture-heritage-and-leisure/suffolk-archaeological-service>